



WR-137 CMR-137 Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band

Waveguide to Coax Adapters Technical Data Sheet

PE9876

Features

- C Band, 5.85 to 8.2 GHz Frequency Range
- WR-137 Waveguide Interface with CMR-137 Flange
- N Female Coaxial Interface
- Comprehensive waveguide offerings also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Description

The PE9876 is a waveguide to coaxial adapter operating in the C band with a 5.85 to 8.2 GHz frequency range. This adapter offers a WR-137 waveguide interface size coupled with a precision tolerance CMR-137 flange. The PE9876 is constructed of aluminum to ensure durability and repeatable RF performance. The coaxial connector offered by this adapter uses a N type Female connector and the package is REACH and RoHS compliant.

Configuration

Waveguide Size	WR-137
Flange	CMR-137
RF Connector	N Female
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	5.85		8.2	GHz
VSWR			1.3:1	
Input Power (Peak)			300	Watts

Mechanical Specifications

Size	
Length	2.28 in [57.91 mm]
Width	2.29 in [58.17 mm]
Height	1.35 in [34.29 mm]
Weight	0.191 lbs [86.64 g]

RF Connector	
Connector Type	N Female
Body Material and Plating	Stainless Steel

Waveguide Interface	
Waveguide Type	WR-137
Flange Type	CMR-137
Body Material and Plating	Aluminum

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-137 CMR-137 Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band PE9876](#)





WR-137 CMR-137 Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band

Waveguide to Coax Adapters Technical Data Sheet

PE9876

Environmental Specifications

Temperature

Operating Range -40 to +85 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant


12/17/2015

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

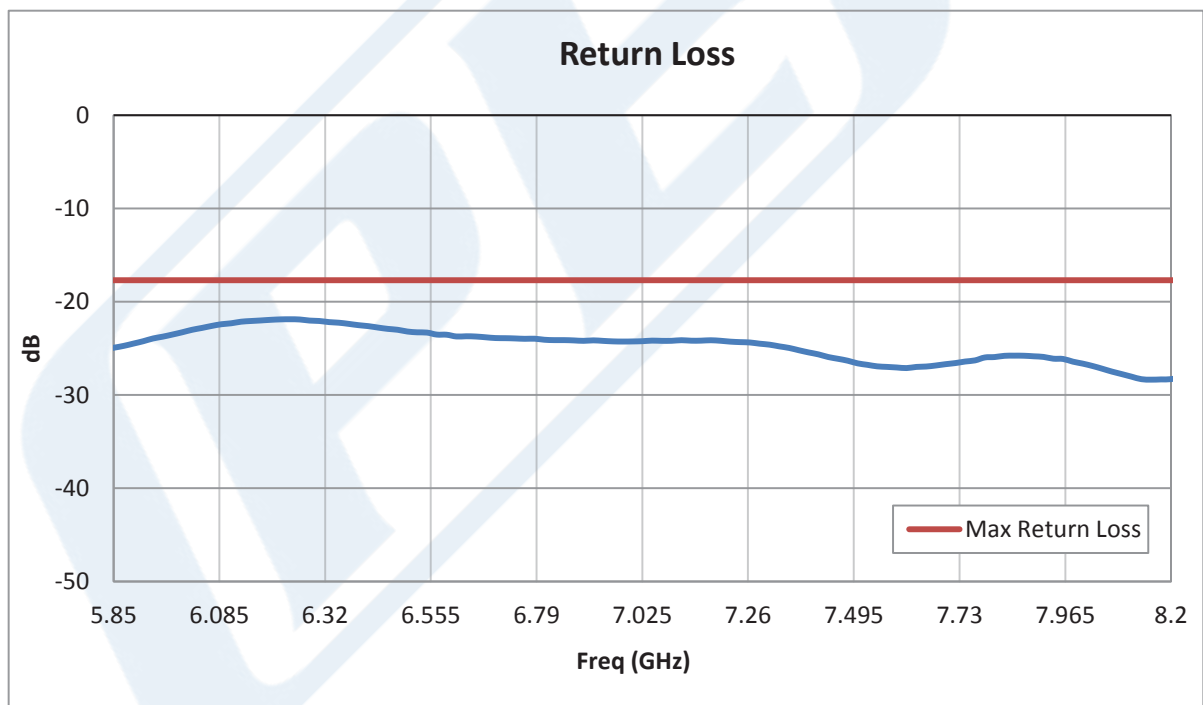

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-137 CMR-137 Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band PE9876](#)





WR-137 CMR-137 Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band

Waveguide to Coax Adapters Technical Data Sheet

PE9876

WR-137 CMR-137 Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-137 CMR-137 Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band PE9876](http://www.pasternack.com/wr-137-n-female-waveguide-coax-adapter-5.85-8.2-ghz-grooved-pe9876-p.aspx)

URL: <http://www.pasternack.com/wr-137-n-female-waveguide-coax-adapter-5.85-8.2-ghz-grooved-pe9876-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE9876 CAD Drawing

WR-137 CMR-137 Flange to N Female Waveguide to Coax Adapter Operating From 5.85 GHz to 8.2 GHz, C Band

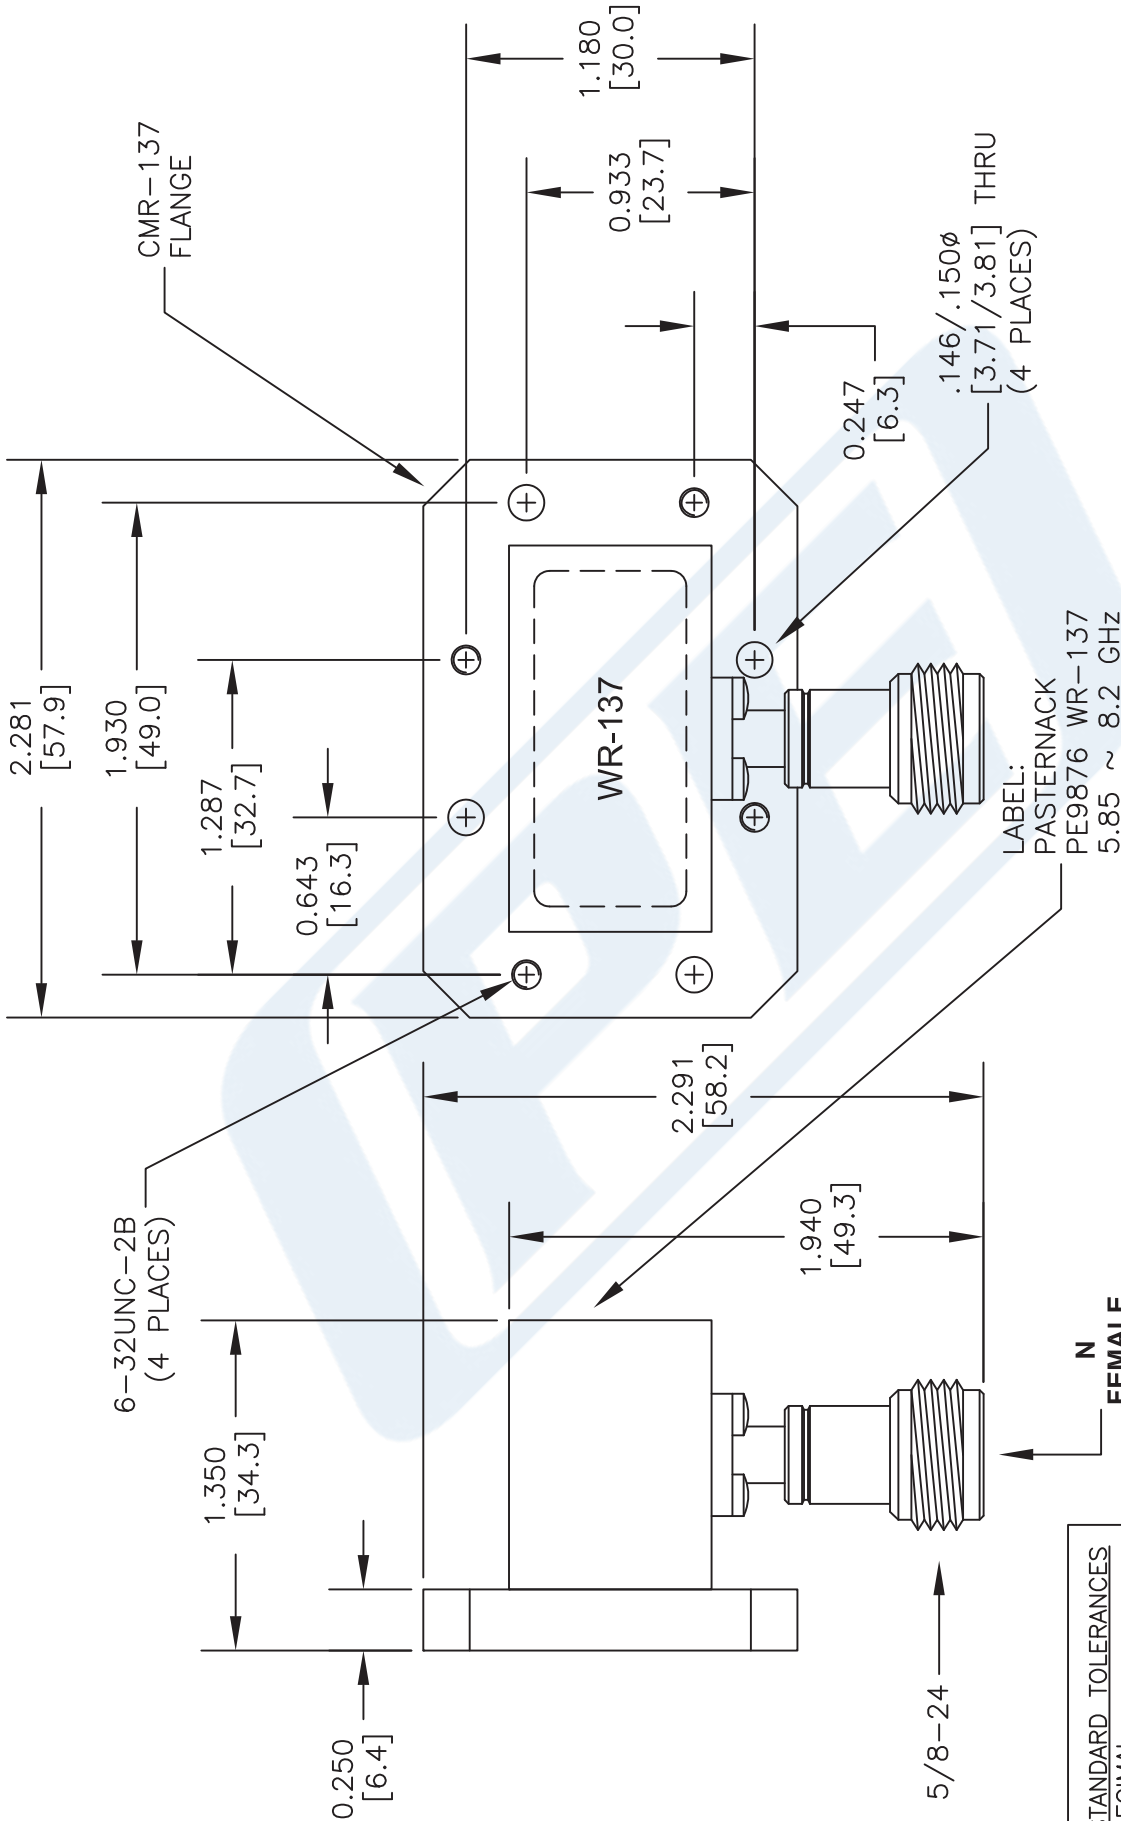

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE9876

FSCM NO. 53919

CAD FILE 040716

SCALE N/A

SIZE A

3045

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com