




21-50-34
UHF/L-band/Data Link
Airborne Blade Antenna
225 - 512 MHz & 960 - 2500 MHz

FEATURES

- **Suitable for Subsonic and Supersonic Aircraft**
- **Lightweight / High Strength**
- **Designed to MIL-STD-810 Environmental conditions**
- **Covers UHF Comms & IFF / TACAN / Link 16 / JTDS / MIDS**
- **Meets MIL-DTL-2565 lightning protection requirements**
- **Elements DC grounded**

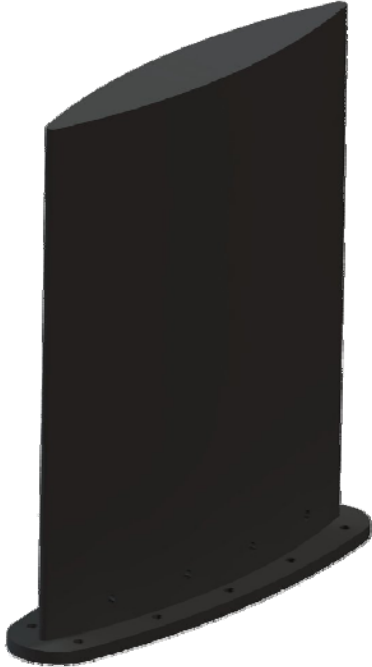

The 21-50-34 is a vertically polarized combined antenna suitable for JTRS extended range UHF communications, L-band and extended range L/S band data link applications.

This antenna uses advanced, high temperature composite material suitable for use on all subsonic airborne platforms as well as supersonic aircraft operating up to Mach 2+.

The antenna is fully sealed to ensure reliability in world wide conditions of service. Separate UHF and L/S band connectors are provided.

Cooper Antennas Ltd for non-USA customers
Thames Industrial Estate, Unit K, Fieldhouse Lane,
Buckinghamshire SL7 1TB, UK
Tel: +44 (0) 1628 482 360
Email: sales@cooperantennas.com
www.cooperantennas.com

 **Australian Representatives**
ROJONE, PTY LTD.
Tel: 02 9829 1555
E: sales@rojone.com.au
www.rojone.com.au

SPECIFICATIONS

Cooper Antennas Model 21-50-34

UHF/L-Band/Data Link Blade Antenna

ELECTRICAL

Frequency	225 - 512 MHz and 960 - 2500 MHz
Gain	225-512 MHz +2dBi average 960-2500 MHz +2dBi average
VSWR	≤ 2.5:1 225 - 400 MHz ≤ 2.75:1 401 - 512 MHz ≤ 2.0:1 960 - 1220 MHz ≤ 2.5:1 1221 - 2500 MHz
Impedance (nominal)	50 Ohms
Power	UHF - 50 Watts CW, L-band - 200 Watts CW
Polarization	Essentially vertical (when mounted vertically)
Antenna RF Connector	UHF - TNC Female L-Band - N Female

MECHANICAL

Antenna Shell Type	High density foam filled high temperature composite shell set on to aluminum alloy base
Height	10 inches (254mm)
Weight	4 lbs (1.81Kg)
Side Loading	≥8 psi ultimate
Base Plate Shape	Symmetrical ellipse
Fixing Holes	10 x Ø 0.200 inches (5mm) holes

FINISH

Antenna	Urethane Lusterless Black
---------	---------------------------

Other finish options are available. Please specify required finish when ordering.

Note: Cooper Antennas Ltd has a policy of continuous product improvement and data herein is therefore subject to change.
Please check with Cooper Antennas Ltd that this data sheet is at latest issue before initiating contract activity.