


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

LTR	DESCRIPTION	DATE	BY
-	Released	3/22/04	JCL

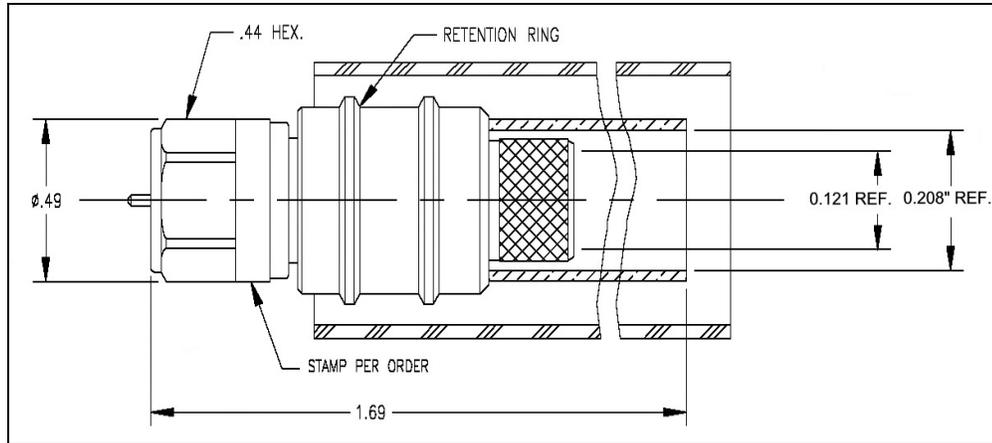

**I. MATERIALS & FINISHES**

center contact: Gold Plated Brass  
 outer contact: Nickel Plated Brass  
 coupling nut: Nickel Plated Brass  
 body: Nickel Plated Brass  
 crimp sleeve: Nickel Plated Copper  
 dielectric: Teflon® PTFE  
 gasket: Silicone Rubber  
 shrink sleeve: Adhesive Lined Polyolefin  
 attachment: braid crimp (.213"hex)

**II. ELECTRICAL PROPERTIES**

impedance: 75 ohms  
 working voltage: 500 vrms (max)  
 vswr: 1.35:1 (max) up to 2.0 GHz  
 insertion loss: 0.15 x √Fghz



**Australian Representatives**  
**ROJONE, PTY LTD.**  
 Tel: 02 9829 1555  
 E: sales@rojone.com.au  
 www.rojone.com.au

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	3/22/04



**TIMES MICROWAVE SYSTEMS**  
 Wallingford, CT 06492  
 (203) 949-8400; (203) 949-8423.Fax  
 www.timesmicrowave.com

**EZ-200-FMH-75**  
 Type-F male Straight Plug  
 for LMR-200-75 Cable

Size A	CAGE CODE <b>68999</b>	Drawing No.: <b>3190-1611</b>
Scale: NA	Rev. (-)	Sheet: 1 of 1