


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

LTR	DESCRIPTION	DATE	BY
-	Released	2/5/02	JCL

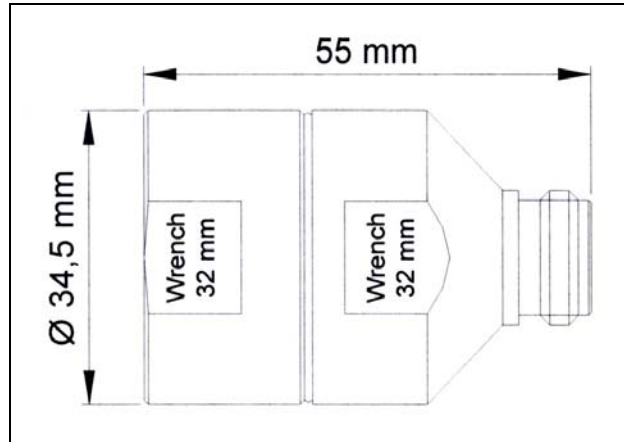

I. MATERIALS & FINISHES

center contact: Silver (50u") Plated Brass
 outer contact: Silver (50 u") Plated Brass
 body: Silver (50 u") Plated Brass
 backnut: Nickel (50 u") Plated Copper
 dielectric: Teflon® PTFE
 gaskets: Nitrile Rubber
 attachment: braid clamp

II. ELECTRICAL PROPERTIES

impedance: 50 ohms
 working voltage: 1000 vrms (max)
 vswr: 1.15:1 (max) up to 3 GHz
 insertion loss: 0.10 x √Fghz


Australian Representatives
ROJONE, PTY LTD.
 Tel: 02 9829 1555
 E: sales@rojone.com.au
 www.rojone.com.au

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	2/5/02


TIMES MICROWAVE SYSTEMS
 Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

EZ-900-NFC-PL-2
Type-N female (jack) – Non-Solder Pin
for LMR-900-LLPL Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-1586
--------	---------------------------	----------------------------------

Scale: NA	Rev. (-)	Sheet: 1 of 1
-----------	----------	---------------