

Precision 75 Ohm F Male to F Male Adapter



RF Adapters Technical Data Sheet

PE91348

Configuration

- F Male Connector 1
- F Male Connector 2
- •75 Ohms

Precision Design

Straight Body Geometry

Description

Pasternack's PE91348 precision 75 ohm type F male to type F male adapter is part of our full line of RF components available for same-day shipping. Our type F to type F adapter has a male to male gender configuration in a precision design. PE91348 type F male to type F male adapter operates to 3 GHz. The Pasternack RF adapter provides excellent VSWR of 1.17:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/ disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Pasternack also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

DC	3	GHz
		0.12
	1.17:1	
	22	dB
	0.3	dB
		22

Mechanical Specifications

Size Length Width Weight	specifications	1.34 in [34.0 0.5 in [12.7 0.032 lbs [14	mm]		
Des	cription	Connector 1	Connector 2		
Туре		F Male	F Male		
Polarity		Standard	Standard		

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision 75 Ohm F Male to F Male Adapter PE91348

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451



Sales@Pasternack.com • Techsupport@Pasternack.com





Precision 75 Ohm F Male to F Male Adapter

RF Adapters Technical Data Sheet

PE91348

Material Specifications

Conne	ctor 1	Connector 2		
Material	Plating	Material	Plating	
F Male		F Male		
Brass	Gold	Brass	Gold	
Brass	Nickel	Brass	Nickel	
Brass	Nickel	Brass	Nickel	
	Material F Male Brass Brass	F Male Brass Gold Brass Nickel	MaterialPlatingMaterialF MaleF MaleBrassGoldBrassBrassNickelBrass	

Compliance Certifications (see product page for current document)

Precision 75 Ohm F Male to F Male Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision 75 Ohm F Male to F Male Adapter PE91348


URL: https://www.pasternack.com/f-male-f-male-straight-adapter-pe91348-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.





PE91348 CAD Drawing Precision 75 Ohm F Male to F Male Adapter

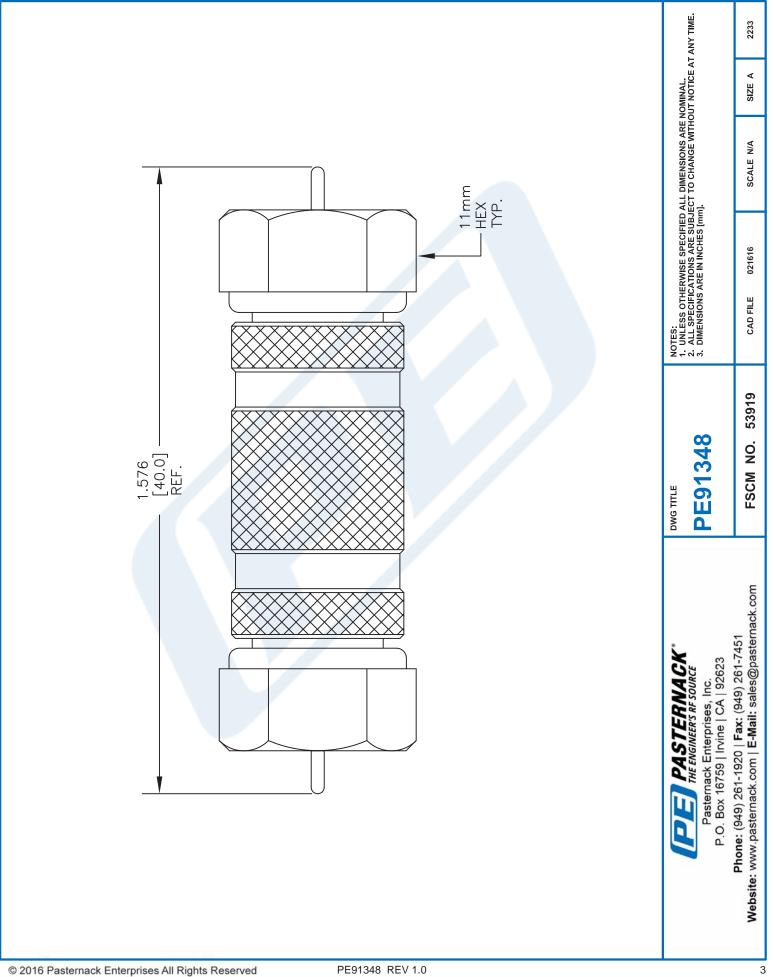

3